

AD-A119 316

MICHIGAN UNIV ANN ARBOR LASER PLASMA RESEARCH LAB
BOUNDARY EFFECTS ON THE DYNAMICS OF CHANNELS GENERATED BY LASER--ETC(U)
JUL 82 L D HORTON, R M GILGENBACH

F/G 20/5

UNCLASSIFIED

LPRL-TR-108

NL

100
400
1000



END
DATE
FILMED
10-82
DTIC

(12)


LPRL*

AD A119316

DTIC FILE COPY



Technical Report
Department of Nuclear Engineering
Laser Plasma Research Laboratory

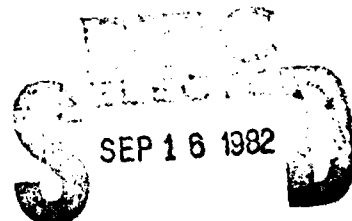

A


82 09 16 020

This document has been approved
for public release and sale; its
distribution is unlimited.

**BOUNDARY EFFECTS ON THE DYNAMICS OF
CHANNELS GENERATED BY LASER-INITIATED
DISCHARGES**

**L. D. Horton and R. M. Gilgenbach
Technical Report #108
July 15, 1982**

**This research supported by The Office of
Naval Research Project NR-012-756**



A

This document has been approved
for public release and sale; its
distribution is unlimited.

| REPORT DOCUMENTATION PAGE | | READ INSTRUCTIONS BEFORE COMPLETING FORM |
|--|-------------------------------------|---|
| 1. REPORT NUMBER Technical Report #108 | 2. GOVT ACCESSION NO. AD-A119316 | 3. RECIPIENT'S CATALOG NUMBER |
| 4. TITLE (and Subtitle) BOUNDARY EFFECTS ON THE DYNAMICS OF CHANNELS GENERATED BY LASER INITIATED DISCHARGES | | 5. TYPE OF REPORT & PERIOD COVERED INTERIM REPORT |
| | | 6. PERFORMING ORG. REPORT NUMBER |
| 7. AUTHOR(s) L.D. Horton and R.M. Gilgenbach | | 8. CONTRACT OR GRANT NUMBER(s) NR-012-756 |
| 9. PERFORMING ORGANIZATION NAME AND ADDRESS The University of Michigan, Ann Arbor, MI 48109 | | 10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS 6115 3N 11; RR011-09-01 NR-012-756 |
| 11. CONTROLLING OFFICE NAME AND ADDRESS Office of Naval Research, Arlington, VA 22217 | | 12. REPORT DATE July 15, 1982 |
| | | 13. NUMBER OF PAGES 9 |
| 14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office) | | 15. SECURITY CLASS. (of this report) UNCLASSIFIED |
| | | 15a. DECLASSIFICATION/DOWNGRADING SCHEDULE |
| 16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited. | | |
| 17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report) | | |
| 18. SUPPLEMENTARY NOTES | | |
| 19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Channel Atmosphere | | |
| 20. ABSTRACT (Continue on reverse side if necessary and identify by block number) The dynamics of unbounded and bounded reduced density channels have been characterized by means of ruby laser schlieren photography. These channels are produced by CO ₂ laser initiated discharges in clean atmospheric pressure air. Bounded channels exhibit a significant compression in width and earlier onset of fine scale turbulence. These results could impact proposed designs for inertial fusion reactors relying upon reduced density | | |

channels for particle transport through gas blankets.

A

S/N 0102-LF-014-6601

L. D. Horton and R. M. Gilgenbach
Department of Nuclear Engineering
The University of Michigan
Ann Arbor, Michigan 48109

DTIC
COPY
INSPECTED
2

Application For
MILITARY GRADE
PAPER
Is enclosed
Check enclosure
by
Postmaster
Available for
and

A

Recent research¹⁻⁴ at other laboratories has produced long reduced density channels in atmospheric pressure air and investigated the feasibility of electron beam injection into these channels. Reduced density channels could have important applications to inertial fusion reactors since they provide a means of transporting particle beams through a high density shielding gas blanket.⁵⁻⁷ Most channel experiments in atmospheric pressure air¹⁻⁴ have been performed in essentially unbounded conditions in which the walls were far enough away to have negligible interaction. The effects of solid boundaries on the dynamic behavior of reduced density channels could, however, have important implications on the design of fusion reactors in which channels may be in close proximity to reactor components. Effects which could degrade channel stability include reflected shock waves⁷ and boundary induced asymmetries which can decrease the onset time for turbulent convective mixing.⁸

We have employed a ruby laser schlieren diagnostic to investigate the dynamics of laser-initiated discharges and to characterize the channel behavior for three cases:

- 1) Unbounded channel conditions,
- 2) A planar insulating boundary on one side of the channel, and

- 3) Two planar insulating boundaries on opposite sides of the channel.

The experimental configuration is depicted schematically in Fig. 1. A TEA CO₂ laser (Lumonics 601A) generates a triangular 100 ns pulse of annular cross section. Calorimetric measurements made downstream of the propylene absorption cell yielded an incident laser energy of 12.3 J for these experiments. The discharge current is supplied by low inductance capacitors switched through a precision triggered spark gap. In these experiments the delay between the laser pulse and the application of high voltage to the electrodes was 7.6 μ s. Schlieren data and open shutter photographs have verified that, with a 2.5 m focal length mirror, the laser breakdown beads almost completely bridge the 9 cm gap with a plasma channel, permitting discharge voltages of 30 kV. For these parameters, the discharge current is 10 kA, with a ringing period of 2.5 μ s. The ohmic power deposition time is approximately 20 μ s, which is longer than the experiments of Refs. 1-4 but shorter than the typical 100 μ s current pulses in lightning return strokes.⁹ The schlieren photography system is similar to that reported in Ref. 2, employing a 20 ns Q-switched ruby laser with a circular aperture in place of the usual knife edge. By varying the rela-

tive delay between the discharge initiation (t_1) and the ruby laser pulse (t_2) we obtain, on separate discharges, the temporal evolution of the channel structure. Multiple schlieren photographs at a given time showed reproducible discharge-to-discharge behavior. Planar lucite boundaries were inserted parallel to the discharge axis to compare the behavior of channels bounded on one or two sides with unbounded channels. The two boundaries were positioned symmetrically across the channel approximately 1.6 cm from the center line of the discharge. The upper boundary was designed to fit in the open center of the annular laser beam to minimize interception. The lower boundary intercepted roughly the same fraction of the beam as the electrode and the support for the upper boundary. The data were taken during a single experimental run so that laser and atmospheric conditions would be identical for all three cases.

Schlieren photographs for the three cases are compared at significant times in Fig. 2. At a time (t) 13 μ s after discharge initiation the channels are virtually identical since the shock waves have not yet impinged on the boundaries. At this time the discharge current is still flowing, which accounts for a discernible electrode effect on the right hand side of the photos. At $t=31 \mu$ s

the shock waves have propagated to and reflected from the boundaries, possibly accounting for the increased density gradients at the channel edge. A significant compression of the channel width (30-50%) occurs at 51 μ s as the reflected shock waves push the channel edge away from the boundaries. Note that for the single boundary at $t=51 \mu$ s the channel axis is shifted downward by 0.6 cm. Large scale breakup of the channel becomes apparent at $t=71 \mu$ s. From 100 μ s through 500 μ s, bounded channels appear to develop small scale turbulence more rapidly than the unbounded channel.

Theoretical research^{8,9} by other investigators has identified convective mixing as the dominant decay mechanism for unbounded reduced density channels. In the case of bounded channels, reflected shocks are also expected to play a major role in channel decay. The data of Fig. 2 suggest that the convective mixing in unbounded channels is associated with longer scale length turbulence, whereas in the bounded cases reflected shock waves appear to drive fine scale turbulence. Further theoretical modeling is required to properly account for boundary effects.

We acknowledge valuable assistance from O.E. Ulrich. This research was supported by ONR Project NR-012-756.


References

- 1) J. R. Greig, D. W. Koopman, R. F. Fernsler,
R. E. Pechacek, I. M. Vitkovitsky, and
A. W. Ali, Phys. Rev. Lett., 41, 174 (1978).
- 2) M. Raleigh, J. R. Greig, R. E. Pechacek, and
E. Laikin, NRL Memorandum Report 4380, Feb. 1981.
- 3) D. W. Koopman, J. R. Greig, R. E. Pechacek,
A. W. Ali, I. M. Vitkovitsky, and R. F. Fernsler,
J. DePhysique 2077, Coll. 7, Suppl. 7, Tome 40,
419 (1979).
- 4) D. W. Koopman and K. A. Saum, J. Appl. Phys.,
44 5328 (1973).
- 5) G. Yonas, Sci. Amer., 239 50 (1978).
- 6) P. A. Miller, R. I. Butler, M. Cowan, J. R. Freeman,
J. W. Poukey, T. P. Wright, and G. Yonas, Phys.
Rev. Lett. 39 92 (1977).
- 7) R. Courant and K. O. Friedrichs, Supersonic Flow
and Shock Waves, Interscience Publishers, NY, 1948,
p. 318.
- 8) J. M. Picone, J. P. Boris, J. R. Greig, M. Raleigh
and R. F. Fernsler, NRL Memorandum Report 4472,
April 1981.
- 9) R. D. Hill, R. G. Rinken, and H. Dale Wilson,
J. Atmos, Sci. 37 179 (1980).

Figure Captions

Fig. 1. Experimental configuration.

Fig. 2. Sequence of schlieren photographs for:
unbounded channels (left hand column),
channels bounded on upper side (center column), and
channels bounded on two sides (right hand column).
The times at the left hand side of each row
indicate the delay between discharge initiation and
schlieren ruby laser pulse. Magnification is indicated
by the 3.2 cm spacing between the upper and
lower boundaries.

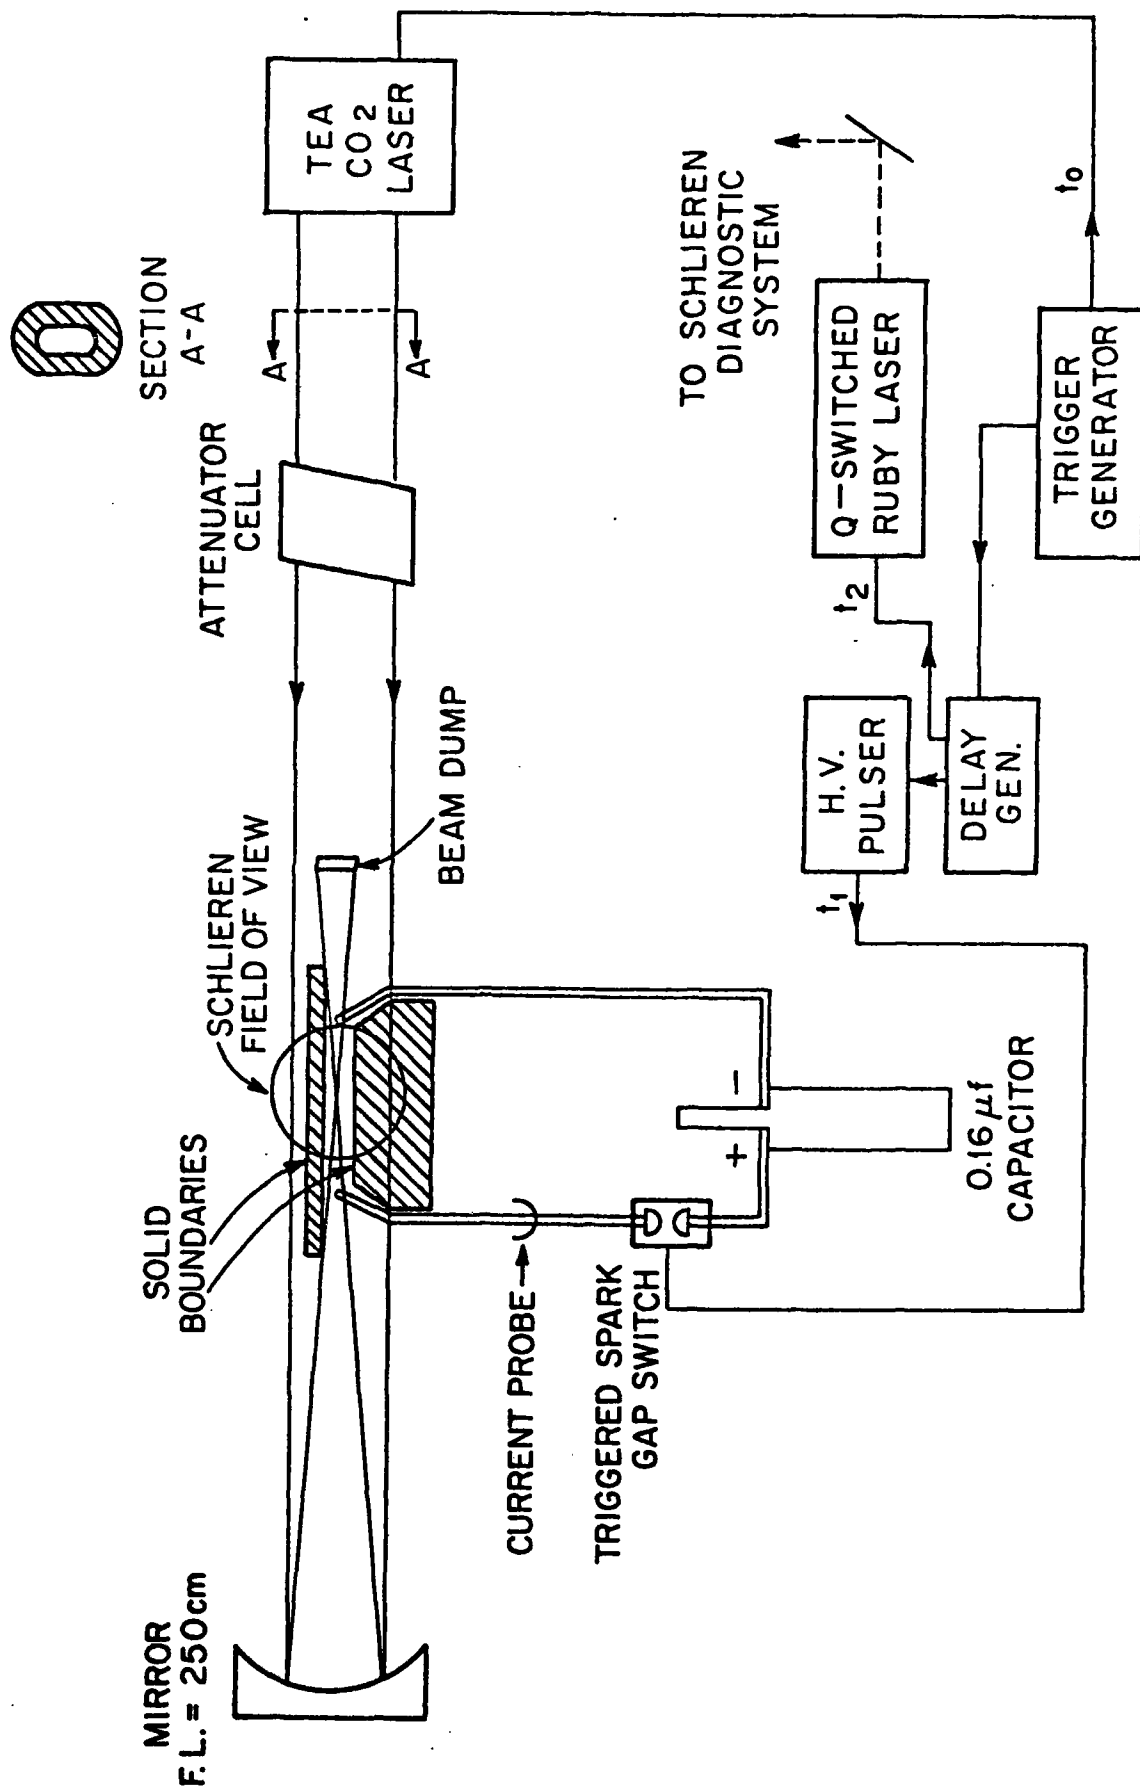

13 μs

31 μs

51 μs

71 μs

100 μs

200 μs

300 μs

500 μs

